

# PSM05A

**SOUNDKING AUDIO**  
com soundking www  
SOUNDKING.

SOUNDKING.



(RMS): 125 6  
150 6  
5

LINE1/LINE 2 : -58 dBu 2 dBu

: -35 dBu 2 dBu

LINE3 ( RCA) -10dBu 2 dBu

MAIN : 0dBu 2 dBu,

: 0dBu 2 dBu

( .  
20 -20 ) +/- 3

(+48 )

20 dBu

20

+30

20

12 +15dB /-3dB

2,5 +15dB /-3dB

100 +15dB /-3dB

THRU

XLR MIC/LINE

MAIN IN

XLR/1/4" TRS

. : 114 1

: 80 -14 (-10 ) ; 100 -10 (-3 )


100 - 240 . (3,15A 250 )

180

( )

345\*230\*300

2,8


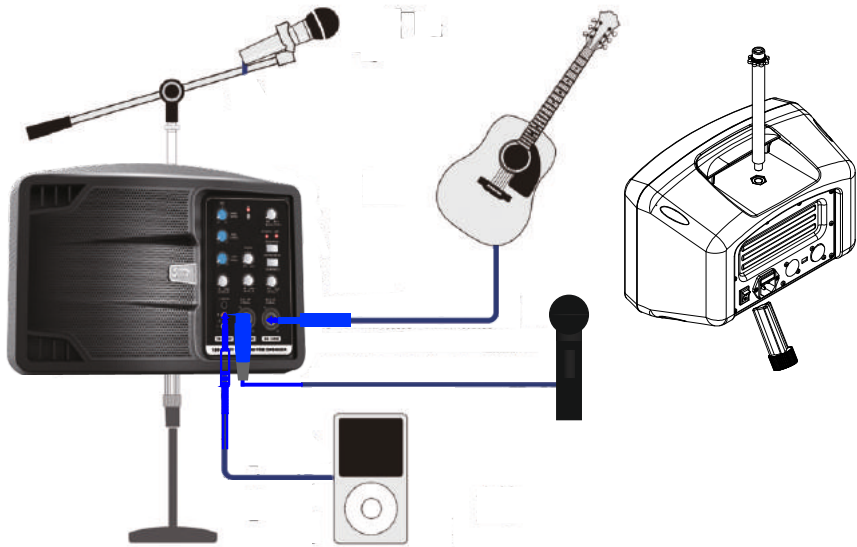


ON:  
OFF:

1

2

MAIN LEVEL LEVEL

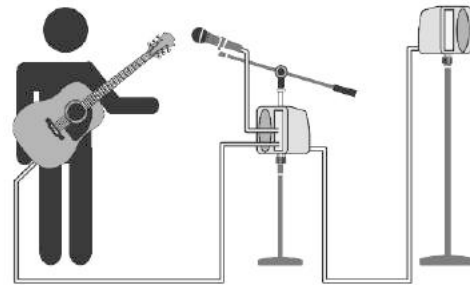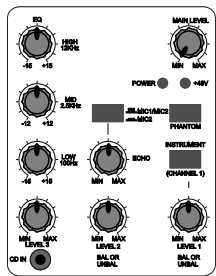

6

7

8

LEVEL

9

HIGH/MID/LOW


10

MAIN LEVEL

3


4

5




4

150-WATT PA / MONITOR SPEAKER

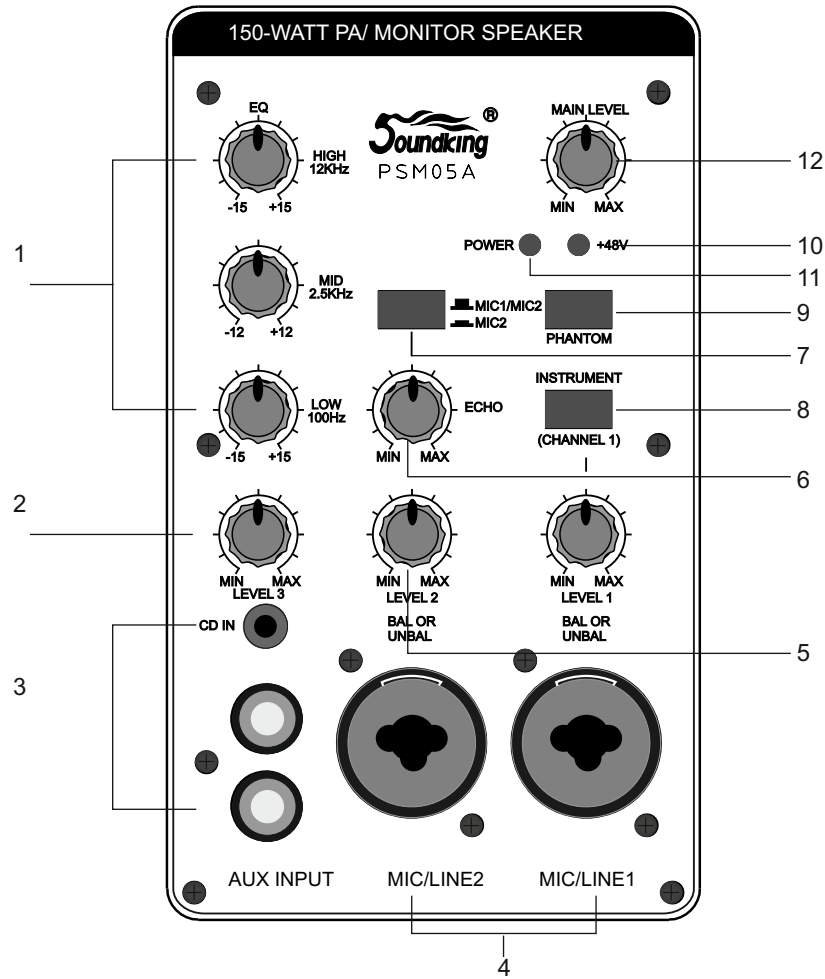

1. : +/- 15
2. Line 3 RCA CD IN
3. Aux CD MP3
4. MIC/LINE:(CH1/CH2) XLR-
5. LEVEL 1&2: (MIC/LINE).
6. ECHO:
7. MIC1/MIC2: CH1/CH2
8. INSTRUMENT: CH2. MIC/LINE1, 1/4" ST
9. PHANTOM: (+48 )
10. POWER
11. MAIN LEVEL
- 12.

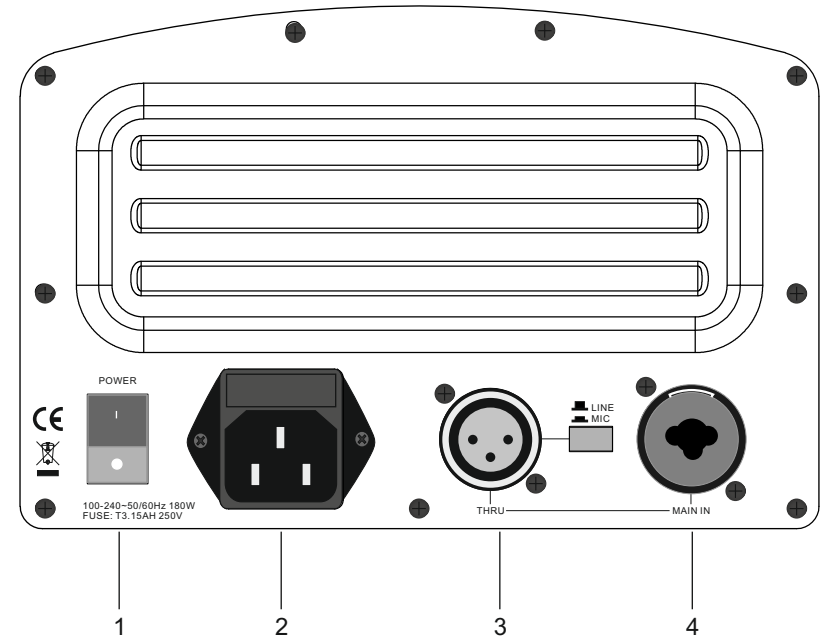

1. /
- 2.
3. THRU: XLR( ) THRU MAIN IN.
4. LEVEL: THRU.
5. MAIN IN: XLR( ) 1/4"TRS THRU