

Stagg®



HEADBANGER MINI 6

12 RGB

SLI-MHB HB6

www.pop-music.ru

8-800-250-55-00

HeadBanger Mini 6.

- 1.
- 2.
- 3.
- 4.
5. DMX
- 6.
- 7.
- 8.
- 9.

1.

HeadBanger Mini 6 1

1 .

1 .

1 .

2.

3.



50

40C.

4.

10

12

5.

DMX

100 240

50-60

Stagg Commandor 10,

220 , 16),


10

110 , 16

DMX
20
DMX-

DMX (110)
DMX (110)

		1
		2
/		3

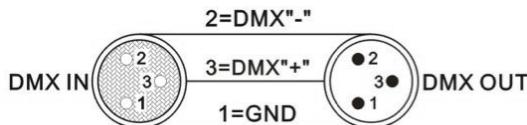

6.

HeadBanger mini 6 12 RGB

3

: 12 3 . (4 , 4 , 4)
: 4929 1 .

: 15

: DMX-512 (8 11), ,

: (540), (270).

: , , (8), RGB ,

: 4

:

: (), (), ()

: 3-pin XLR (), 3-pin DMX (), 3-pin DMX ()

:

:

: 50


: 17,5 x 13,5 x 14,5

: 1,7

7.

HeadBanger Mini 6

: DMX—512,

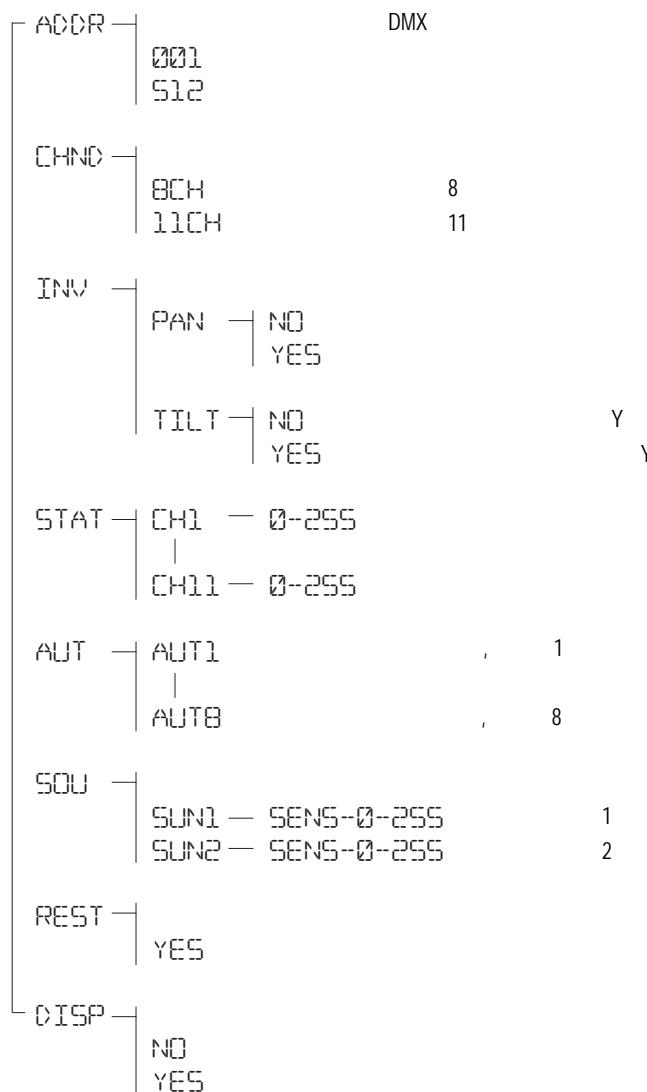

8.

DMX

	Menu	DMX	(Addr)	Enter
	Enter	DMX	(1-512)	
	Menu			
9	(9Ch)	12	(12Ch) -	Enter
				Menu

8

1	0-255	(PAN) 0-540		
2	0-255	(Tilt) 0-220		
3	0-255	(Dimmer) 0-100%		
4	0-255	(Red) 0-100%		
5	0-255	(Green) 0-100%		
6	0-255	(Blue) 0-100%		
7	0-255	()		
8	0-5			
	6-15	100% / +/ 0%		
	16-25	- / 100% / 0%		
	26-35	0% / 100% / +		
	36-45	0% / - / 100%		
	46-55	+ / 0% / 100%		
	56-65	100% / 0% / -		
	66-75	100% / + / +		
	76-85	- / - / 100%		
	86-95	100% / 100% / 100% / 100%		
	96-110	1()		
	111-125	2()		
	126-140	3()		
	141-155	4()		
	156-170	5()		
	171-185	6()		
	186-200	7()		
	201-215	8()		
	216-230	1()		
	231-245	2()		
	246-254			
	255	5		

1	0-255	(PAN) 0-540
2	0-255	(PAN) 16
3	0-255	(Tilt) 0-220
4	0-255	(Tilt) 16
5	0-255	()
6	0-255	(Dimmer) 0-100%
7	0-255	(Red) 0-100%
8	0-255	(Green) 0-100%
9	0-255	(Blue) 0-100%
10	0-255	()
11	0-5	
	6-15	100% / +/ 0%
	16-25	- / 100% / 0%
	26-35	0% / 100% / +
	36-45	0% / - / 100%
	46-55	+ / 0% / 100%
	56-65	100% / 0% / -
	66-75	100% / + / +
	76-85	- / - / 100%
	86-95	100% / 100% / 100% / 100%
	96-110	1()
	111-125	2()
	126-140	3()
	141-155	4()
	156-170	5()
	171-185	6()
	186-200	7()
	201-215	8()
	216-230	1()
	231-245	2()
	246-254	
	255	5

Menu (INV) Enter

Enter X (PAN)

Enter X (no) X (YES),

Enter

Menu Y (TILT)

Enter Y (no) Y (YES),

Enter Menu

Menu (STA) Enter

(1-11) Enter

(0-255).

Enter Menu

)

Menu (AUT)

Enter

(Show): Show 0 (SH0), Show1 (SH1), Show2 (SH2)..... Show8 (SH8),

Enter Menu

Menu (Sou) Enter

1 (SUN1) 2 (SUN2) -

Enter (SENS) (1-225)

Enter Menu

	Menu	(rest)	Enter
Enter			YES
	Menu	(dISP)	Enter
	dISP ()	dISP (),	Enter
	Menu		
9.			
1.	CE	EMC (2004/108/CE), (2006/95/EC).	CE (93/68/EEC)
2.	«	»	WEEE
	() (2002/96/EC).	
3.	«RoHS compliant»		
	(2002/95/EC)		

Stagg®

